




# MIDI, MEGA and ANL fuses, and fuse holders

[www.victronenergy.com](http://www.victronenergy.com)


## MIDI, MEGA i ANL DC osigurači za baterije i nosači osigurača





Nosač osigurača za MIDI osigurač





MIDI osigurač

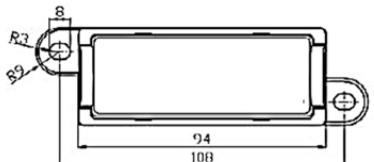


Nosač osigurača za MEGA osigurač

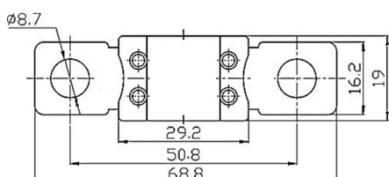

MEGA osigurač



Nosač osigurača za ANL osigurač

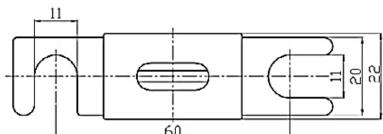

ANL osigurač

MIDI OSIGURAČ 32V	Prosečan pad napona	Otpor
MIDI osigurač 100A/32V	60 mV	0,45 mΩ
MIDI osigurač 150A/32V	80 mV	0,30 mΩ
MIDI osigurač 200A/32V	80 mV	0,25 mΩ
MIDI OSIGURAČ 58V	Prosečan pad napona	Otpor
MIDI osigurač 60A/58V	70 mV	0,9 mΩ
MIDI osigurač 100A/58V	70 mV	0,45 mΩ

MEGA OSIGURAČ 32V	Prosečan pad napona	Otpor
MEGA osigurač 60A/32V	120 mV	1,5 mΩ
MEGA osigurač 80A/32V	90 mV	0,7 mΩ
MEGA osigurač 100A/32V	90 mV	0,6 mΩ
MEGA osigurač 125A/32V	90 mV	0,4 mΩ
MEGA osigurač 150A/32V	90 mV	0,35 mΩ
MEGA osigurač 175A/32V	90 mV	0,3 mΩ
MEGA osigurač 200A/32V	80 mV	0,25 mΩ
MEGA osigurač 225A/32	80 mV	0,22 mΩ
MEGA osigurač 250A/32V	80 mV	0,2 mΩ
MEGA osigurač 300A/32V	80 mV	0,17 mΩ
MEGA osigurač 400A/32V	70 mV	0,13 mΩ
MEGA osigurač 500A/32V	70 mV	0,1 mΩ
MEGA OSIGURAČ 58V	Prosečan pad napona	Otpor
MEGA osigurač 125A/58V	90 mV	0,4 mΩ
MEGA osigurač 200A/58V	80 mV	0,25 mΩ
MEGA osigurač 250A/58V	80 mV	0,2 mΩ
MEGA osigurač 300A/58V	80 mV	0,17 mΩ

ANL OSIGURAČI 80V	Prosečan pad napona	Otpor
ANL osigurač 400A/80V	125 mV	0,3 mΩ
ANL osigurač 500A/80V	100 mV	0,25 mΩ